

2-wire HART® transmitter

6335D

- RTD, TC, Ohm, or mV input
- Extremely high measurement accuracy
- HART® 5 protocol
- Can be installed in Ex zone 0
- 1- or 2-channel version



Application

- Linearized temperature measurement with Pt100...Pt1000, Ni100...Ni1000, or TC sensor.
- Difference or average temperature measurement of 2 resistance or TC sensors.
- Conversion of linear resistance variation to a standard analog current signal, for instance from valves or Ohmic level sensors.
- Amplification of a bipolar mV signal to a standard 4...20 mA current signal.
- Connection of up to 15 channels to a digital 2-wire signal with HART® communication.


Technical characteristics

- Within a few seconds the user can program PR6335D to measure temperatures within all ranges defined by the norms.
- The RTD and resistance inputs have cable compensation for 2-, 3- and 4-wire connection.
- The 6335D has been designed according to strict safety requirements and is therefore suitable for application in SIL 2 installations.
- Continuous check of vital stored data for safety reasons.
- Sensor error detection according to the guidelines in NAMUR NE89.

Mounting / installation

- Mounted vertically or horizontally on a DIN rail. As the devices can be mounted without any distance between neighboring units, up to 84 channels can be mounted per meter.
- NB: As Ex barrier we recommend 5106B.

Connection

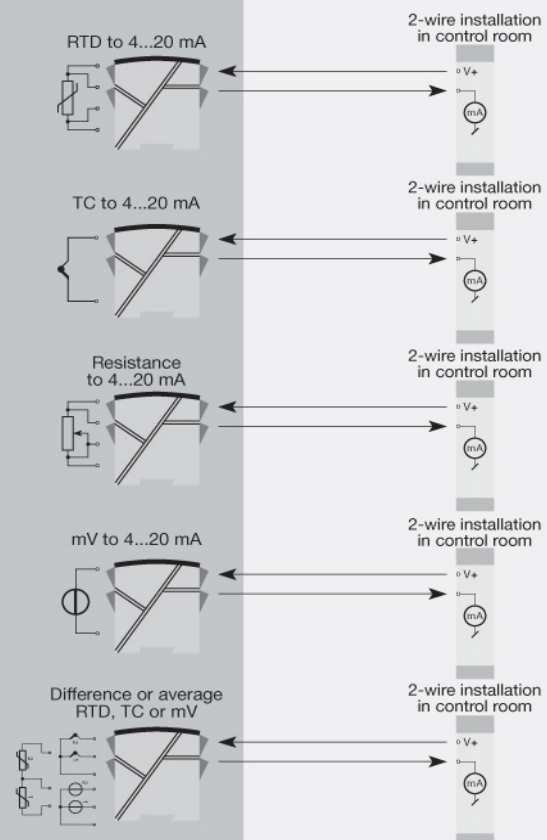

Order:

Type	Galvanic isolation	Channels
6335D	1500 VAC : 2	Single : A Double : B

*NB! Please remember to order CJC connectors type 5910Ex (channel 1) and 5913Ex (channel 2) for TC inputs with an internal CJC.

Environmental Conditions

Specifications range.....	-40°C to +60°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Weight (1 / 2 channels).....	145 / 185 g ₂
Wire size.....	1 x 1.5 mm ² stranded wire

Common specifications

Supply voltage.....	8.0...30 VDC
Voltage drop.....	8.0 VDC
Isolation voltage, test / working.....	1.5 kVAC / 50 VAC
Isolation voltage, ch. 1 / ch. 2.....	1500 VAC
Warm-up time.....	30 s
Communications interface.....	Loop Link & HART
Signal / noise ratio.....	Min. 60 dB
Response time (programmable).....	1...60 s
Signal dynamics, input.....	22 bit
Signal dynamics, output.....	16 bit
Effect of supply voltage change.....	< 0.005% of span / VDC

Input specifications

Max. offset.....	50% of selected max. value
RTD input.....	Pt100, Ni100, lin. R
Cable resistance per wire (max.), RTD.....	5 Ω (up to 50 Ω per wire is possible with reduced measurement accuracy)
Sensor current, RTD.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire), RTD.....	< 0.002 Ω / Ω
Sensor error detection, RTD.....	Yes
TC input: Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5
Cold junction compensation (CJC).....	< ±1.0°C
Sensor error detection, TC.....	Yes
Sensor error current: When detecting / else.....	Nom. 33 μA / 0 μA
Voltage input: Measurement range.....	-800...+800 mV
Min. measurement range (span), voltage input.....	2.5 mV
Input resistance, voltage input.....	10 MΩ

Output specifications

Current output: Signal range.....	4...20 mA
Min. signal range.....	16 mA
Updating time.....	440 ms
Load resistance, current output.....	≤ (Vsupply - 8) / 0.023 [Ω]
Load stability, current output.....	≤0.01% of span/100 Ω
Sensor error detection, current output.....	Programmable 3.5...23 mA
NAMUR NE 43 Upscale/Downscale.....	23 mA / 3.5 mA
*of span.....	= of the presently selected range

Approvals

EMC.....	EN 61326-1
ATEX.....	KEMA 09ATEX0148
IECEX.....	DEK 11.0084X
FM.....	2D5A7
CSA.....	1125003
GOST R.....	Yes
GOST Ex.....	Yes
SIL 2.....	Hardware assessed for use in SIL applications